




FM-3WS Audio Feast
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer


Wiring Connection

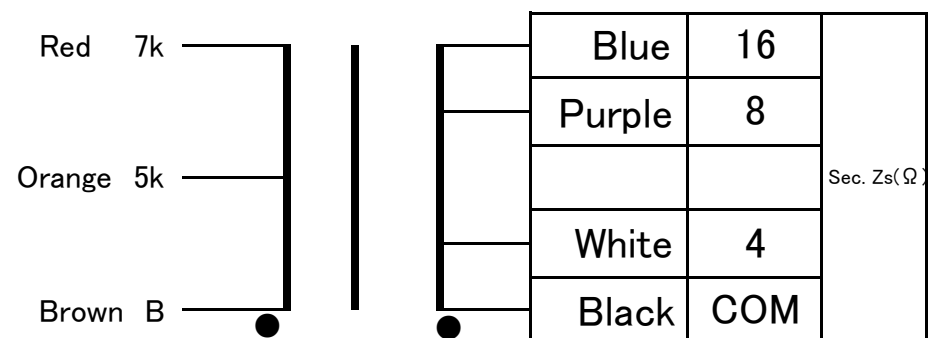

Output 3W(70Hz)
 Freq. Response 25~50kHz(DC18mA 7k-8Ω -3dB)
 Pri. Inductance 20H(7k) 15H(5k) 1kHz DC18mA
 Pri. DCR 351Ω(7k) 303Ω(5k) Sec. DCR 1.43Ω(16Ω)
 Pri. max DC Current 35mA(7k) 40mA(5k)
 Dimension 65x50x65(H)mm



Image is FM-3WS without Urushi finish

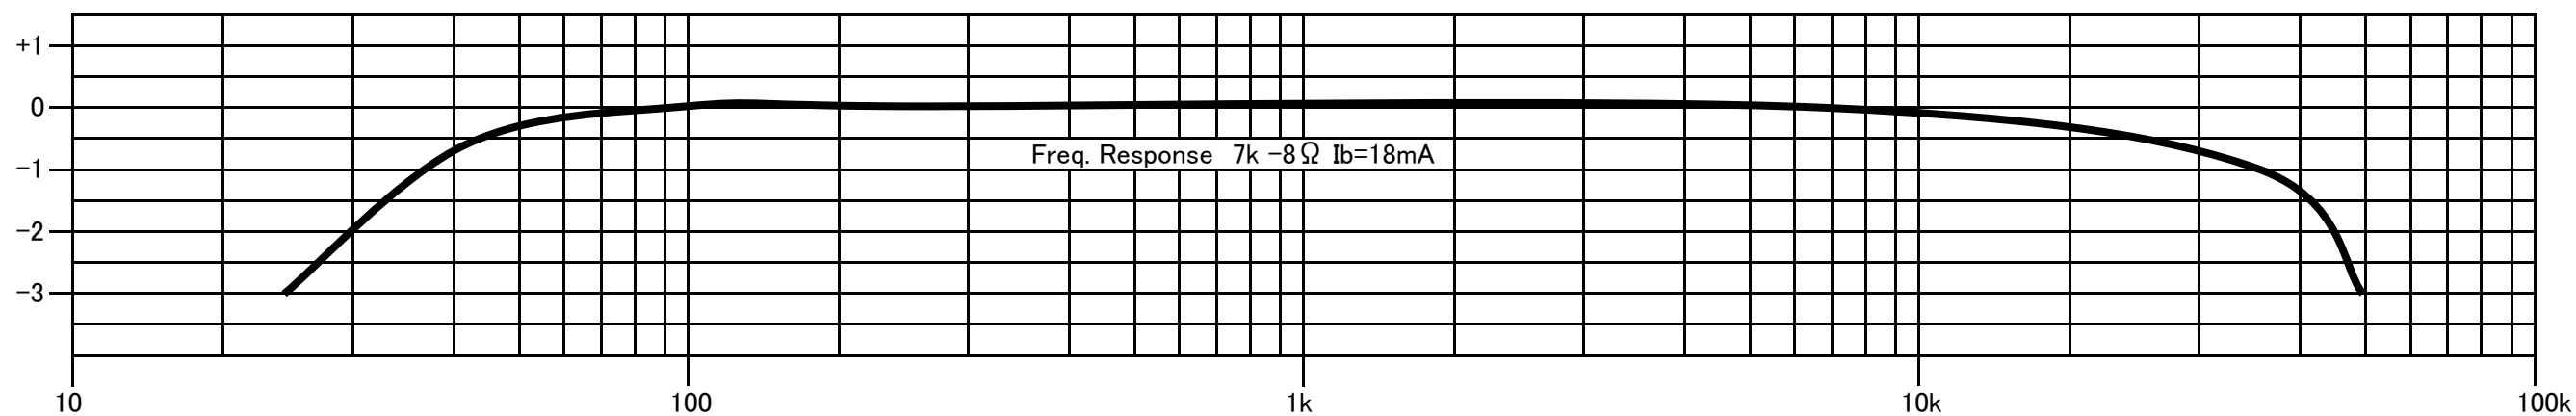

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)