




FM-3WS-H Audio Feast
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer


Wiring Connection

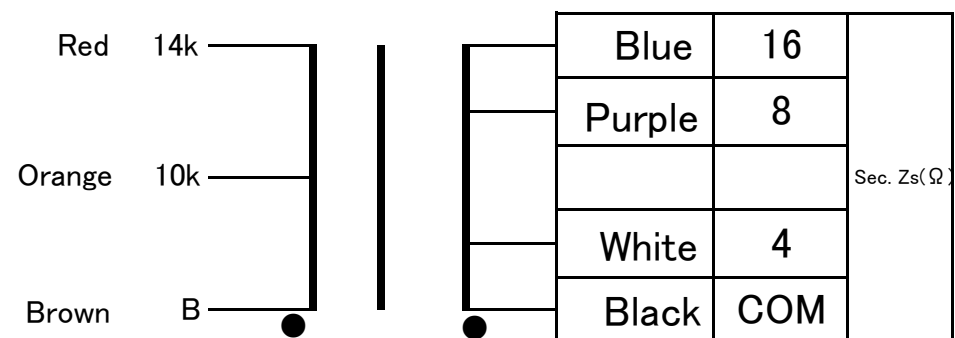

Output 3W(70Hz)
 Freq. Response 25~40kHz(DC15mA 10k-8Ω -3dB)
 Pri. Inductance 20H(7k) 40H(14k) 29H(10k) 1kHz DC8mA
 Pri. DCR 597Ω(14k) 516Ω(10k) Sec. DCR 1.46Ω(16Ω)
 Pri. max DC Current 25mA(14k) 30mA(10k)
 Dimension 65x50x65(H)mm



Image is FM-3WS without Urushi finish

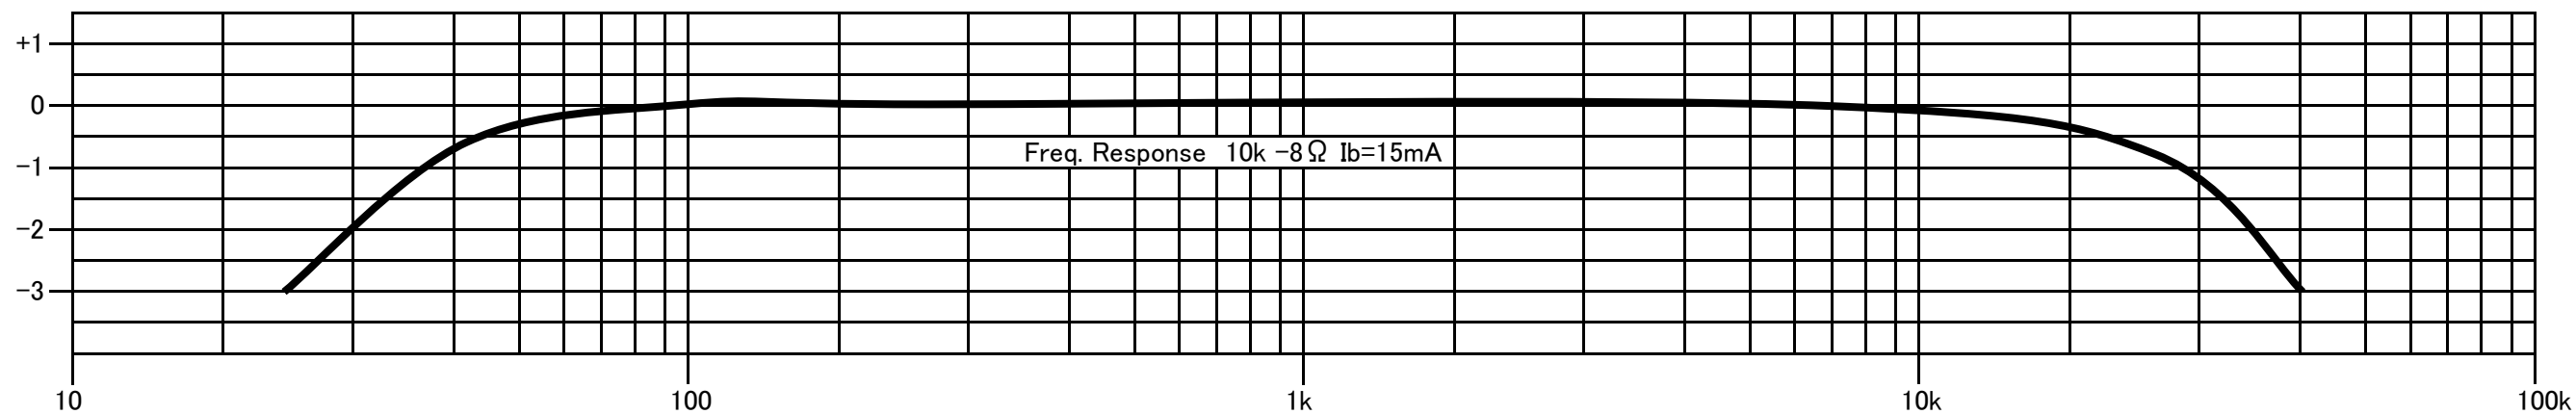

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)