




FM-50WS-10K



FINEMET® NANOCRYSTALLINE Core Output Transformer

Audio Feast

Wiring Connection

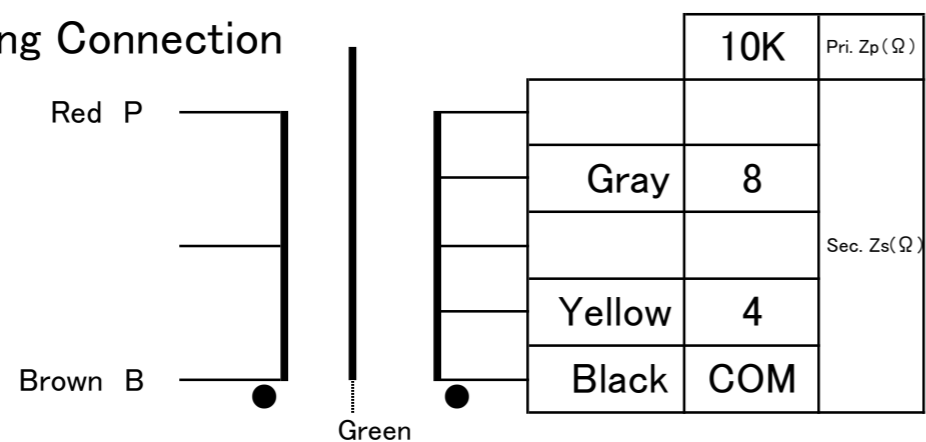

Output 50W (50Hz)
Freq. Response 10~40kHz
Pri. Inductance 45H (1kHz Dc 60mA)
Pri. DCR 258 Ω Sec. DCR 0.44 Ω (8 Ω)
Pri. max DC current 120mA Loss 0.34dB
Dimension 100x100x150 (H) Black hammered metal case, or Urushi finish
Mounting Screw 80x80 4-M5

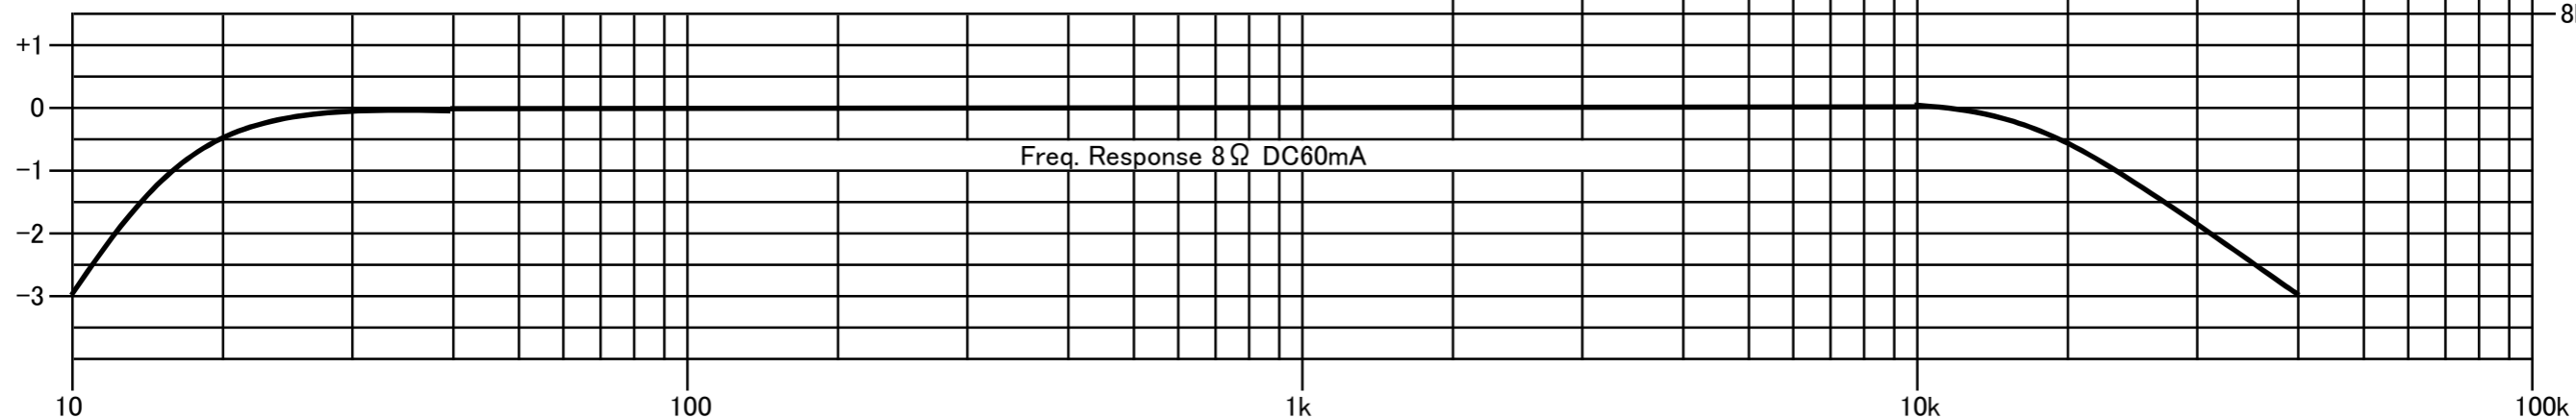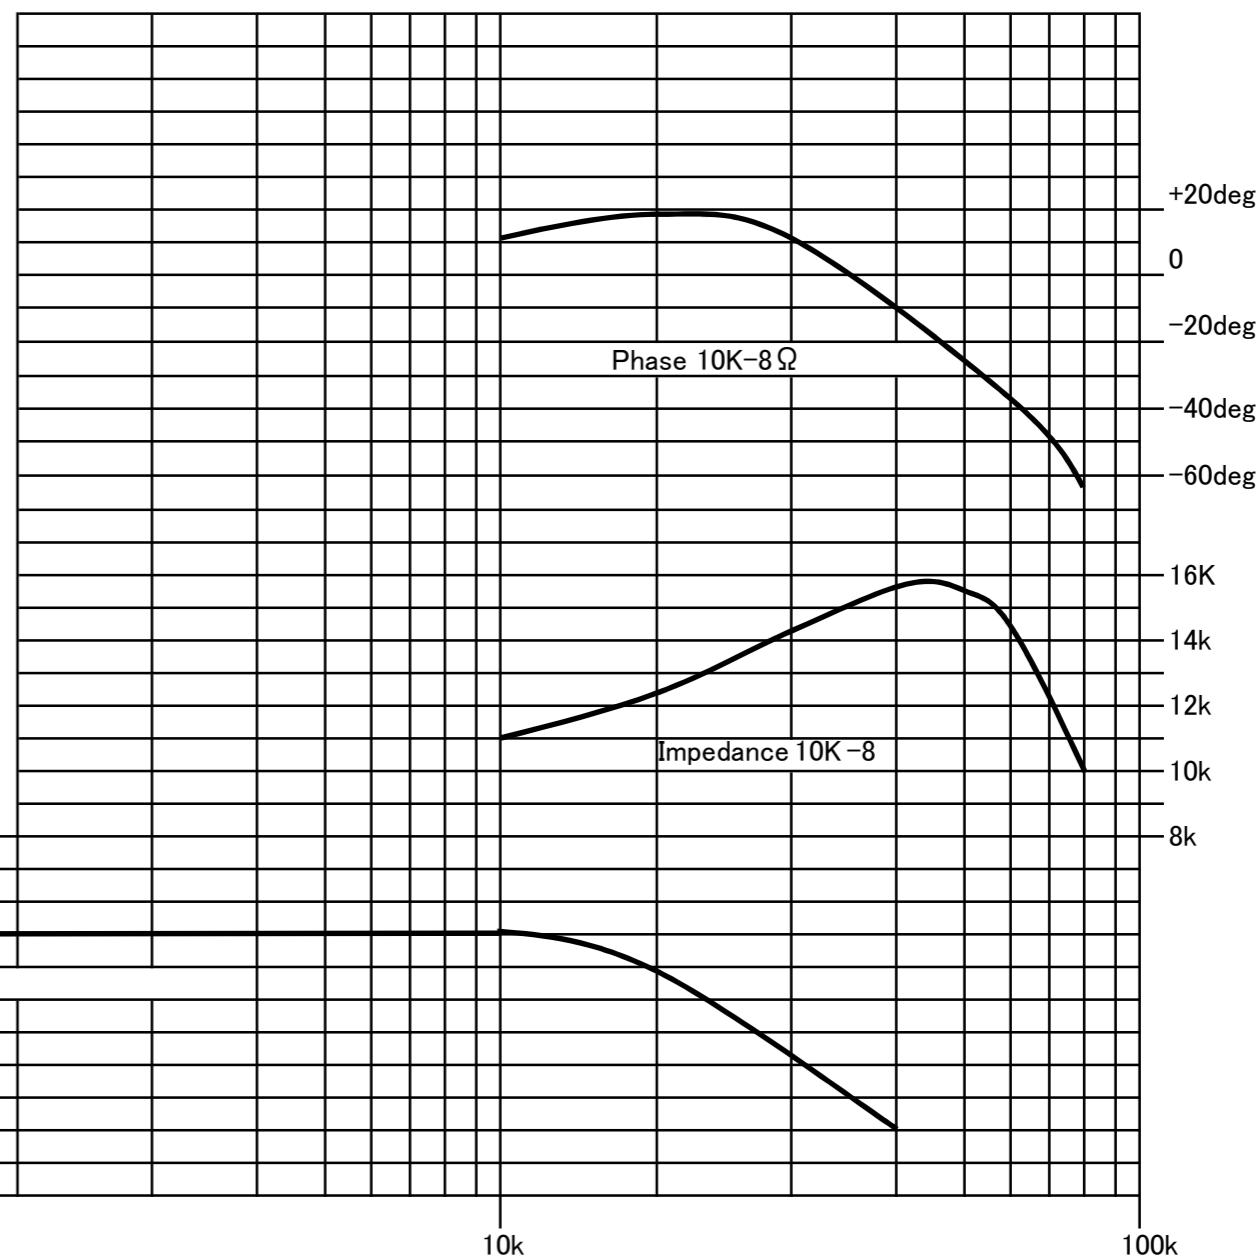

Email: CleanUnderwear@gmail.com
Web: TheAudioFeast.com
Distributed by Audio Feast (Nashville, TN, USA)
Final finish by Teramoto (Myoko, Japan)
Designed by General Ind. (Saitama, Japan)