






FM-6WS
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer Audio Feast

Wiring Connection

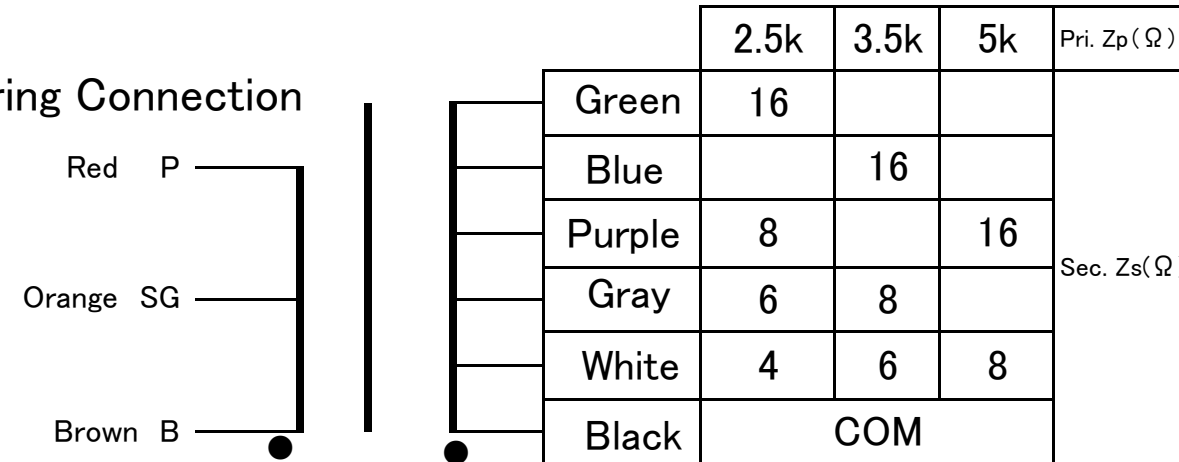

Output 6W(50Hz)
 Freq. Response 25~65kHz(DC60mA 3.5k-8Ω -3dB)
 Pri. Inductance 10H(100Hz DC60mA)
 Pri DCR 219Ω
 Pri. max DC Current 80mA
 Dimension 85x57x54(H)mm Band Style

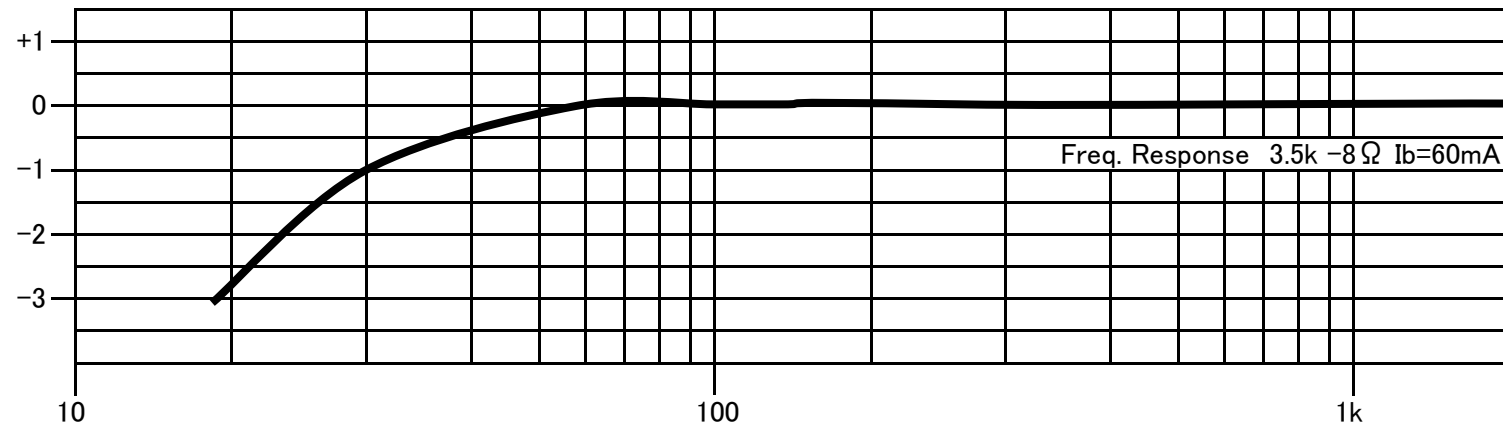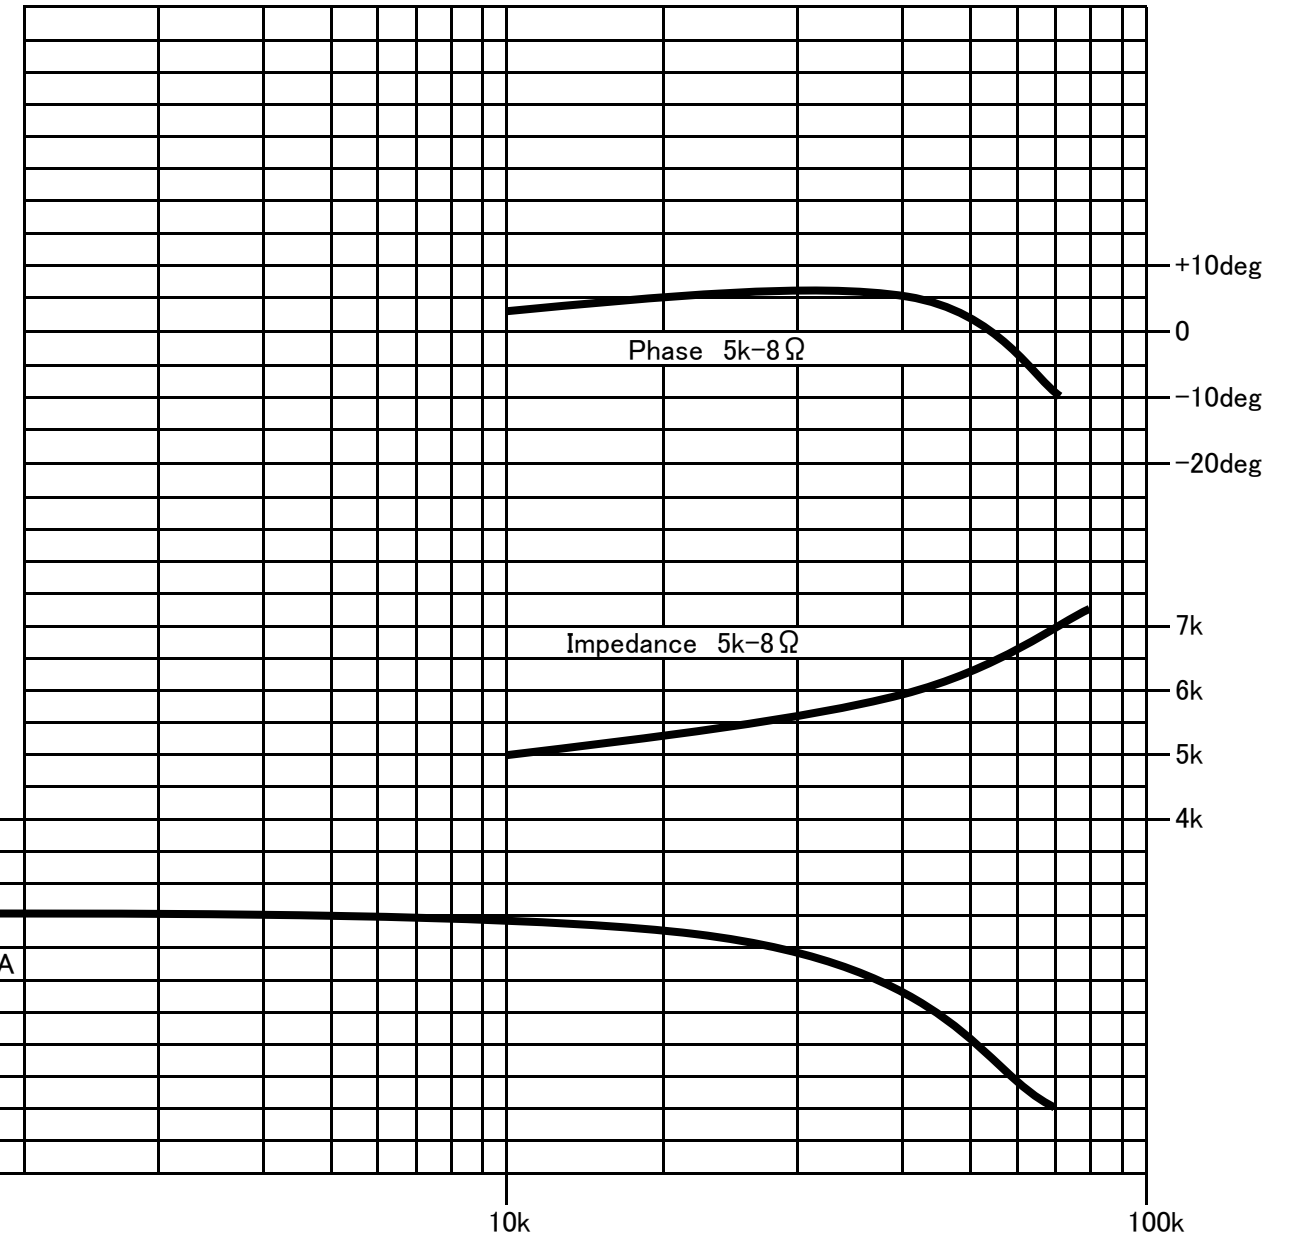

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)