





FM-50WS-2k Audio Feast
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer

Wiring Connections

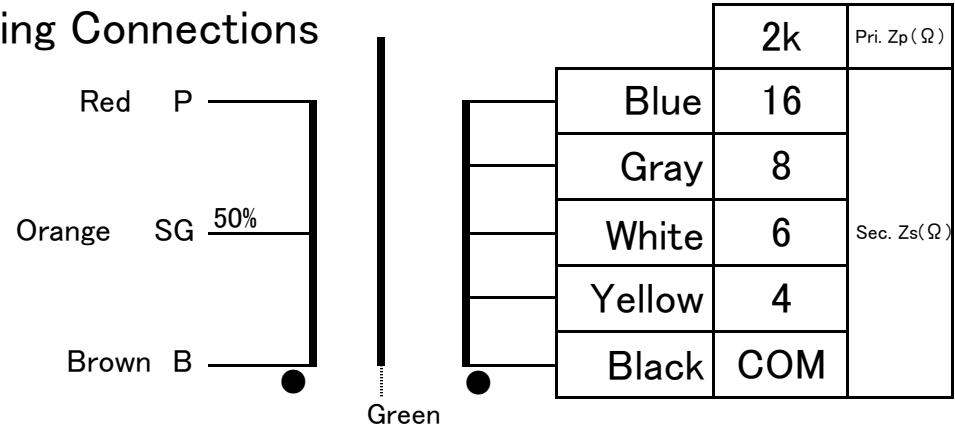


Output 50W (50Hz)
 Freq. Response 5~45kHz (DC 90mA 2k-8Ω -3dB, 1W)
 Pri. Inductance 15H (1kHz Dc 90mA)
 Pri. DCR 67Ω Sec. DCR 0.34Ω (8Ω)
 Pri. max DC current 200mA Loss 0.29dB
 Dimension 100x100x150(H)mm Black hammered metal case, or Urushi finish
 Mounting Screw 80x80mm 4-M5

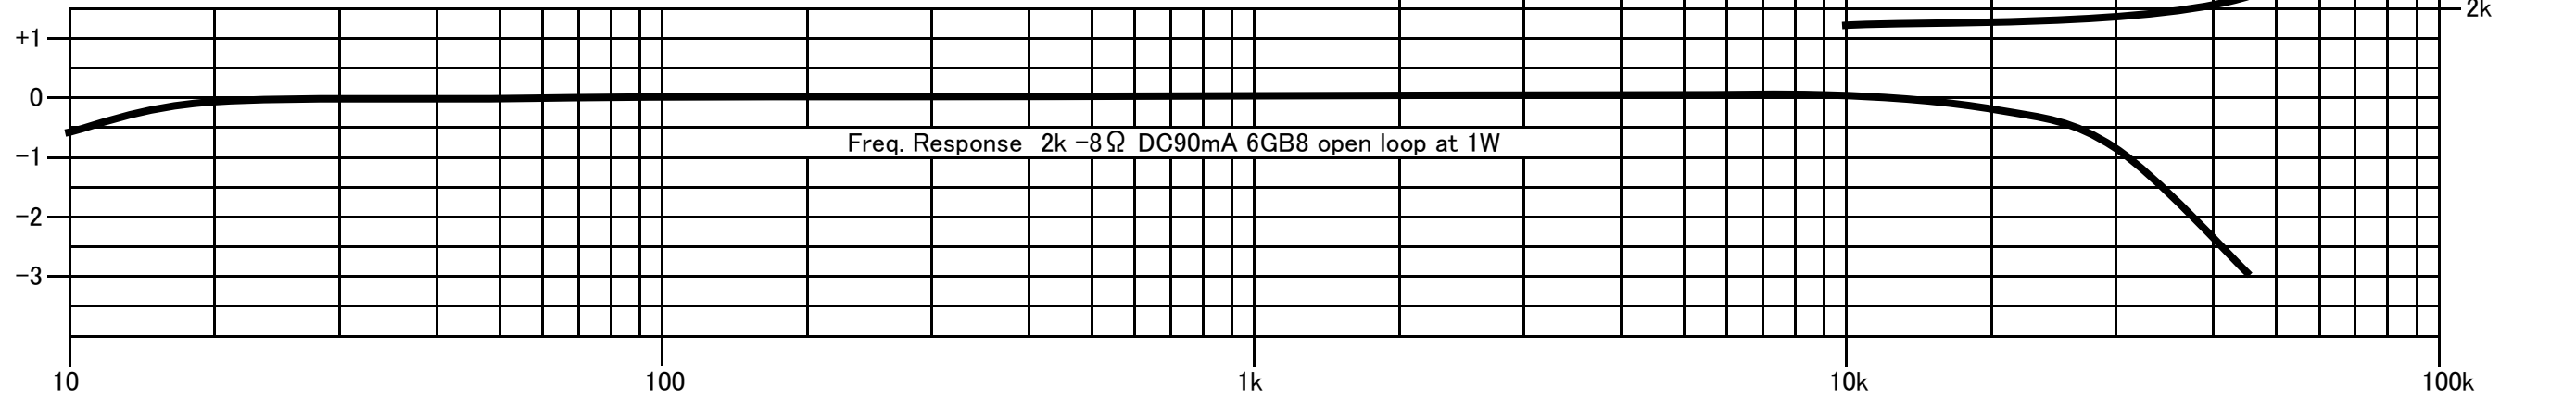

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR
Urushi finish

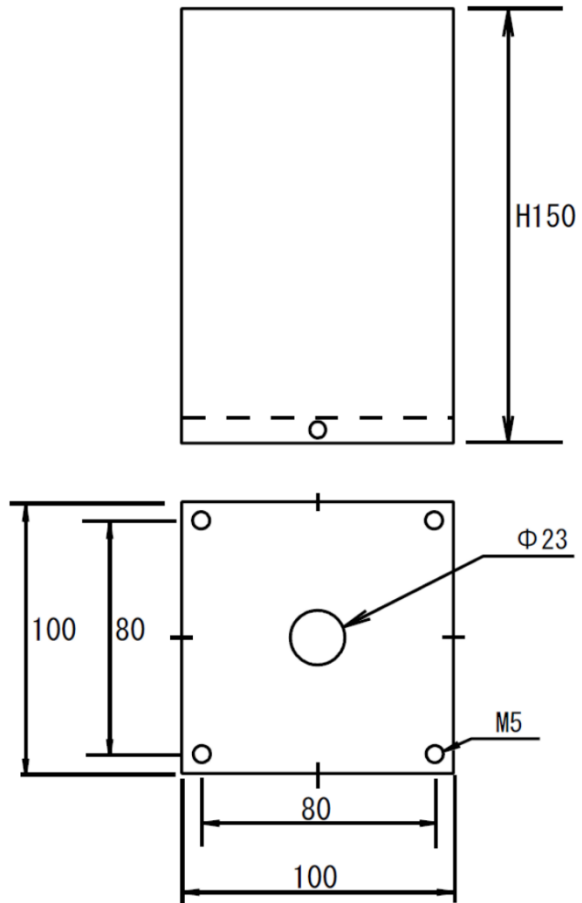

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

