





FM-50P
 FINEMET® NANOCRYSTALLINE Core Push Pull Output Transformer Audio Feast

Wiring Connection

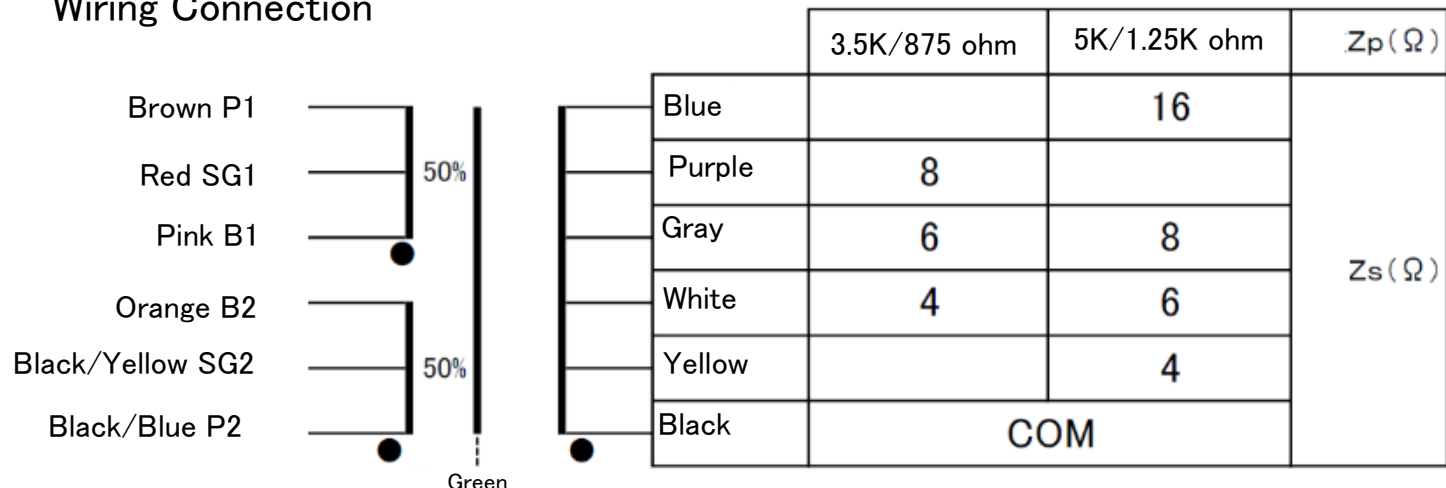


Output 50W(40Hz 5k-4 ohm)/64W max(40Hz 3.5K-4 ohm)
 Freq. Response 3-40kHz(5k-8 ohm -1dB)
 Pri. Inductance 200H min, 650H max (10H)
 Pri. DCR 73.5 ohm (P1-B1), 73.5 ohm (B2-P2), Sec. DCR 0.298(com-8 ohm)
 Pri. max DC current 370mA (2 tubes, 5k ohm), Unbalance current 5mA max/740mA (2 tubes, 1.25k ohm), Unbalance current 20mA max
 Loss 0.26dB(16 ohm)
 Dimension 100x90x120(H)mm Black hammered metal case, or Urushi finish
 Mounting Screw 80x70mm 4-M4

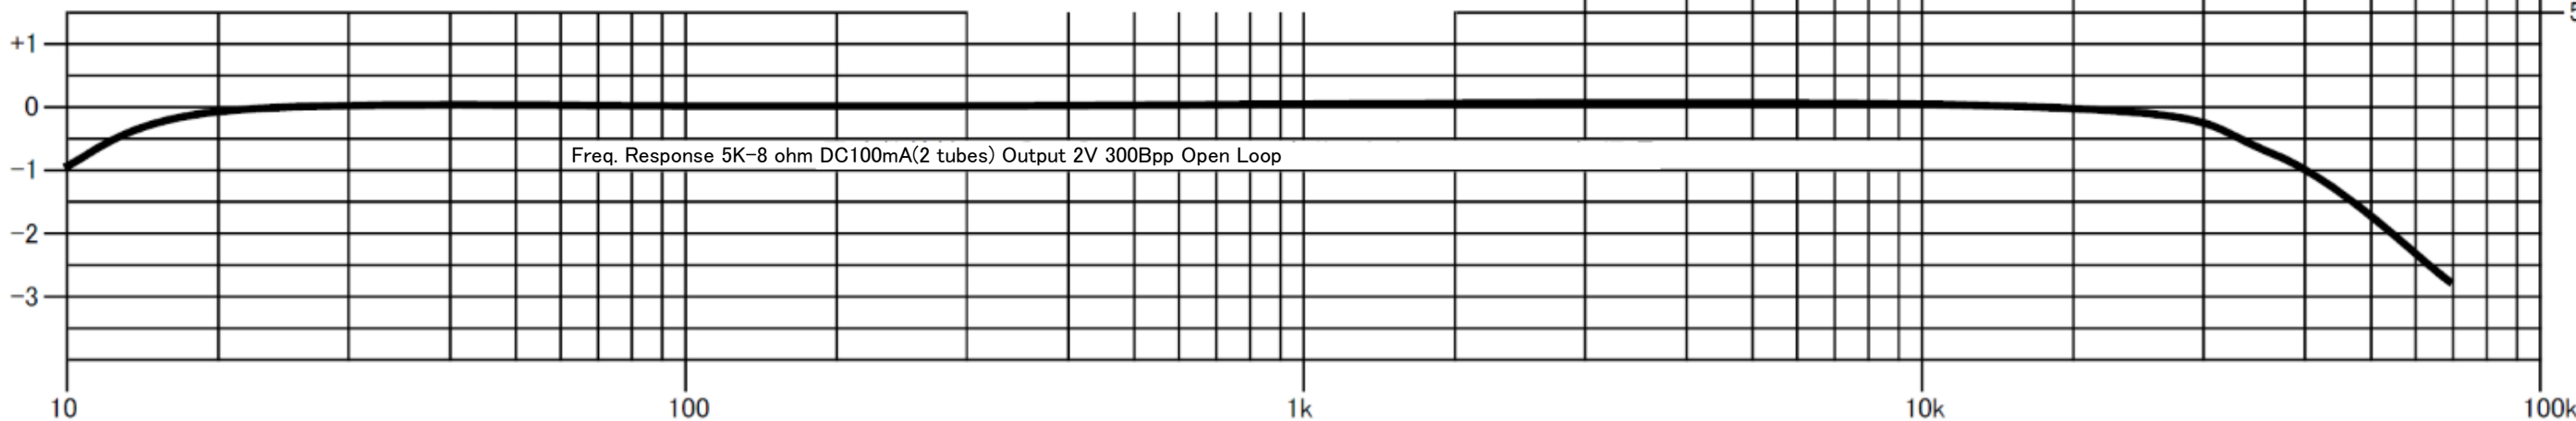

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR
Urushi finish

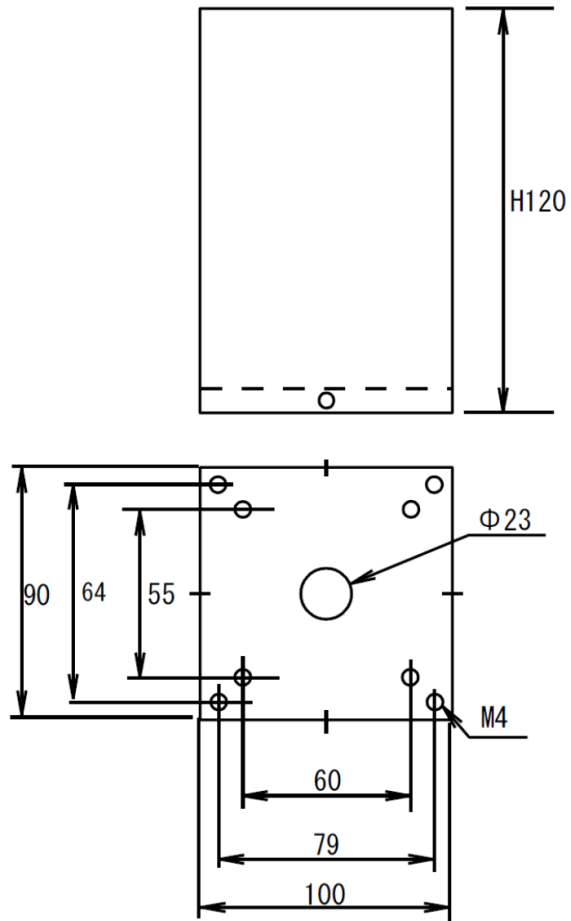

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

